



HDP 1400G

High Definition PowerCenter™

Owner's Manual

TABLE OF CONTENTS

	Page
Important Safety Information	i
Proper Grounding and Installation	1
A Note from The Head Monster	2
Monster GreenPower™	4
Monster Clean Power® Filtering	5
Monster T2™ Technology	6
Advanced Tri-Mode® Surge Protection	7
The Minds Behind The Monster PowerCenter™ Design.	8
Monster HDP1400G PowerCenter™ Features	9
Hook-Up Guide	
Monster GreenPower RF Control Outlets.	12
RF Remote Control Syncing for Multiple PowerCenters	13
Coaxial Connections Hook-Up.	14
Phone and Network Connections.	15
Troubleshooting	16
Specifications	19
Warranty Information	20

IMPORTANT SAFETY INFORMATION

Please read and observe the following safety points at all times.

WARNING – Power Sources

Do not plug this PowerCenter™ into a power outlet that differs from the source indicated for safe use on the PowerCenter. If you don't know the type of electrical power that is supplied to your home, consult your local power company or a qualified electrician.

WARNING – Grounding and Polarization

- A. Do not force your PowerCenter plug into an outlet that is not designed to accept a three-wire grounded-type AC plug (a three-prong plug). This plug is designed to be inserted into a grounded-type outlet only. If this plug doesn't fit directly inside your outlet, do not attempt to force it into the outlet. Never attempt to dismantle the plug in any way (or to alter the power cord). Do not attempt to defeat the grounding feature by using a 3-to-2 prong adapter. If you have questions about grounding, consult your local power company or a qualified electrician.
- B. If you use rooftop devices such as satellite dishes, antennas, or any other component with wire that connects to your PowerCenter, be sure the wire(s) is properly grounded. This protects against voltage surges and static charges.
- C. Do not place any antenna near overhead power lines or any other power circuit. Do not touch any power line or power circuit. Doing so may cause severe physical injury or possibly death.

WARNING – Liquid: Avoiding Electrical Shocks

- A. Do not operate your Monster PowerCenter if liquid of any kind is spilled onto or inside the unit.
- B. Do not operate your Monster PowerCenter near rain or water that's spilled or contained (e.g., bathtub, kitchen or sink).

 **WARNING – Power Cord Safety**


- A. When routing your PowerCenter's AC power cord, do not place it near heavy foot traffic areas (e.g., hallways, doorways, and floors). Do not create a trip hazard with the power cord.
- B. If your power cord's protective jacket begins to rip or fray, exposing the internal wiring, shielding, etc., disconnect it from the AC power source and discontinue use of the Monster PowerCenter immediately. See the Warranty Information section of this owner's manual for important details.


 **WARNING – No User Serviceable Parts Inside**

If, for any reason, your PowerCenter is not operating properly, do not remove any part of the unit (cover, etc.) for repair. Unplug the unit and consult the Warranty Information section of this owner's manual for important details.

 **CAUTION – Exposure To Heat**

Do not expose your PowerCenter to direct sunlight or place it near wall heaters, space heaters, or any enclosed space prone to temperature increase.

 **CAUTION** – To reduce the risk of electric shock, use only indoors and in dry locations. Do not allow the device to be exposed to moisture, rain, dust, excessive heat or direct sunlight.

 **CAUTION** – Connect this device to a 3-prong-grounded outlet. Make sure the circuit branch is protected and not servicing equipment requiring heavy electricity.

NOTE: This equipment has been tested and complies with Part 15 of the FCC rules.

Operation is subjected to the following conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference, including interference that may cause undesired operation

PROPER GROUNDING AND INSTALLATION

WARNING – Proper Grounding

Monster PowerCenters require a properly grounded outlet for safety and to protect connected equipment. If you're not sure if your home's electrical wiring is properly grounded, have it checked by a qualified electrician.

Important Note – Proper Power and Protection

To completely protect your equipment against electrical surges, every AC power cable coaxial cable, network line, and phone line in the system must be connected to an appropriate PowerCenter outlet or port.

Important Note – Proper Protection and the Limited Connected Equipment Warranty

The U.S. \$500,000 Limited Connected Equipment Warranty becomes invalid if any wire (AC, coax, phone or network) or audio or video interconnect leading into the equipment comes from a component that is not properly protected by the PowerCenter. See the Warranty Information section of this owner's manual for important details.

A NOTE FROM THE HEAD MONSTER

THANK YOU for purchasing the Monster Power® High Definition PowerCenter HDP 1400G. This PowerCenter is designed to save energy costs by eliminating stand-by mode power consumption. It also provides advanced power protection to keep your valuable home theater equipment safe from dangerous power conditions, and features power filters specially tuned for high definition AV components.

To address growing concerns about the waste and cost of stand-by or sleep mode energy use, the 1400G features Monster GreenPower™ RF Control outlets that can be switched off by the included remote control, so you can easily power down your HDTV, DVD/Blu-ray™ Disc player, subwoofer, and other components that consume power in stand-by mode even after you turn them off. You'll not only save money, but you'll also reduce your carbon footprint and help make the earth a cleaner, greener planet.

Other Monster Power breakthroughs include exclusive T2™ automatic disconnect protection circuitry and patented Tri-Mode® protection featuring an audible alarm. Tri-Mode automatically disconnects equipment from both live power lines (line and neutral) and sounds an alarm. Microprocessor-controlled T2 takes protection a step further. T2 works with Tri-Mode circuitry to automatically disconnect both the PowerCenter itself and your equipment from both live powerlines (line and neutral) when a dangerous surge or spike hits.



Noel Lee

Patented Monster HD Clean Power® is specifically designed for today's high definition home theater components. Its filters are precision-engineered to virtually stop the electromagnetic and radio frequency noise that goes right through typical surge protectors. This advanced technology reduces stress on delicate digital circuitry, maximizing the lifespan of connected equipment and delivering improved performance.

These days, AV components are better than ever, providing thrilling surround sound and razor sharp HD picture. With Monster Power, you'll have peace of mind knowing your home theater investment is protected and that you're getting all the performance you paid for, while saving money and energy with GreenPower.

A handwritten signature in black ink, appearing to read 'Noel Lee', written in a cursive style.

Noel Lee,
The Head Monster

MONSTER GREENPOWER™ RF CONTROLLED OUTLETS

GreenPower RF Controlled Outlets provide a convenient way to reduce energy wasted by your equipment in stand-by mode. Five outlets can be turned on or off with the wireless radio frequency remote control included.




PATENTED MONSTER CLEAN POWER® FILTERING


Your home's electricity is full of noise and interference caused by all of your appliances and electronics: cell phones, computers, even your lights, all contribute to the problem. This "dirty power" stresses the delicate digital circuitry inside HDTVs and other home theater equipment, reducing their performance and potentially shortening their lives.

However, ordinary surge protectors can't remove the effects of dirty power. The HDP 1400G features HD Clean Power filtering that is precision-engineered to remove electrical noise and interference. This protects the delicate digital circuitry inside your HDTV and other electronics from unnecessary wear. HD Clean Power maximizes your equipment's lifespan and ensures the best possible picture and sound performance.

To learn more about patented Monster Clean Power and the complete product family of PowerCenters, voltage stabilizers and amplifiers, please visit MonsterPower.com.



Actual spectrum analyzer photo of AC power pollution



AC power line filtered by Monster Clean Power

PATENTED MONSTER T2™ TECHNOLOGY

The Monster HDP1400G features exclusive Monster T2 technology. T2 is an active electronic microprocessor-controlled circuit that sits in front of the surge protection circuitry in select Monster Power products. T2 monitors the line, neutral and ground lines and automatically disconnects the PowerCenter from the AC power line when a long duration low-voltage sag or high-voltage swell occurs (continuous voltage below 80Vrms or above 132Vrms).

When the voltage sags or swells to these potentially damaging levels, ultra-fast T2 auto-disconnect protection circuitry shuts down the Monster PowerCenter for 15 seconds. When the under-voltage or over-voltage condition returns to normal, T2 reconnects the PowerCenter to the electricity and resets to full operation after 15 seconds. If the power fault condition does not clear, the T2 comparator circuit keeps the unit shut down.

Unlike ordinary power management devices, T2 will shut down your PowerCenter before the MOVs (Metal Oxide Varistors) and thermal fuses sense an overload condition and sacrifice themselves to protect your connected components. This will extend the PowerCenter's life, while providing the system protection you need.



ADVANCED TRI-MODE® SURGE PROTECTION

For added protection against more powerful overloads, patented Monster Tri-Mode automatically disconnects your equipment and sounds an alarm.

Tri-Mode protects against surges and spikes on all three power lines (line, neutral, and ground) for a triple layer of safety. Only Tri-Mode offers this level of protection.



THE MINDS BEHIND THE MONSTER POWERCENTER™ DESIGN



Richard Marsh – Richard developed Monster’s patented Clean Power® circuitry, and is also responsible for several other groundbreaking designs including the high-end audio balanced circuit design, the MultiCap internal bypass capacitor, and the Servo-DC feedback concept in power amplifiers – a concept that is used by virtually every amplifier manufacturer today.



Demian Martin – Demian helped create several innovative AC power solutions. He was the co-founder of Spectral Audio and was the chief designer of their many pioneering designs for amplifiers, D/A converters, and other high-end audio designs. He now brings his expertise to Monster Power’s elite research and development team.




Noel Lee – Noel Lee, The Head Monster, is best known for popularizing the concept of high performance audio cable 25 years ago with his creation of Monster Cable. Originally a laser-fusion design engineer at Lawrence Livermore National Laboratory and later a touring musician, Noel has invented or co-invented over 250 U.S. and international patents. Monster Power is Noel’s realization of a long-nurtured vision of making affordable power solutions that deliver the best possible sound and picture.




Tony DiChiro was one of the founders of Kinergetics Research in 1971. Kinergetics developed numerous patented technologies that advanced the state of the art in audio technology, and released highly acclaimed home theater products. Kinergetics also debuted the first high-end surround sound processor with THX certification. Tony currently heads up the R&D team at Monster Cable where he continues to develop advanced products with cutting edge features.

MONSTER HDP 1400G POWERCENTER FEATURES

HDP 1400G
TOP VIEW

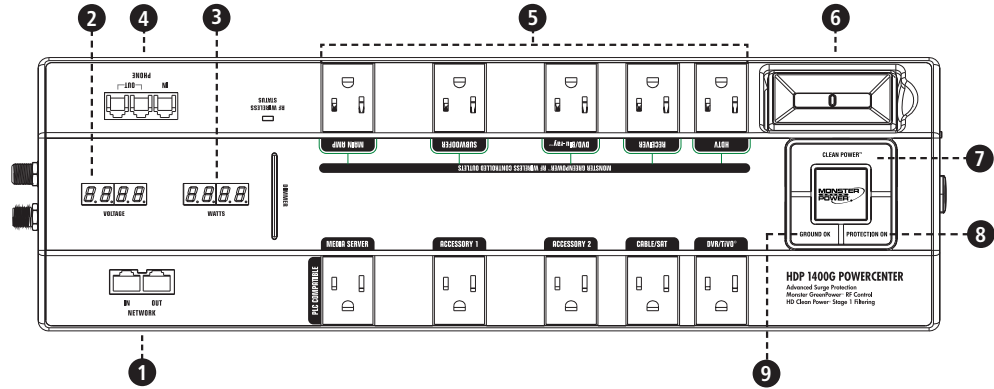

HDP 1400G
SIDE VIEW

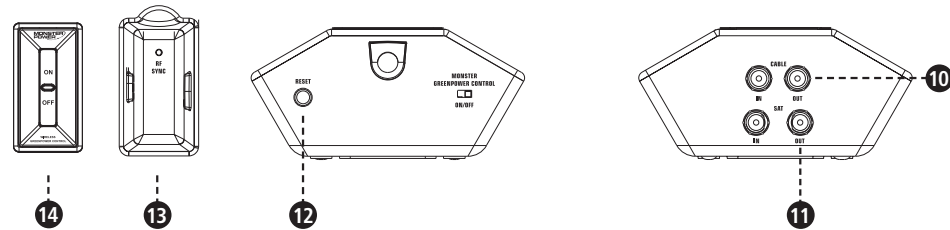

HDP 1400G POWERCENTER FEATURES

TOP

1. Network Line Surge Suppression: Provides surge protection against damaging voltage, surges and spikes on the Ethernet line.
2. Digital Display for Voltage: Indicates input voltage.
3. Digital Display for Wattage: Indicates output wattage.
4. Phone Line Surge Suppression: Provides surge protection against damaging voltages surges and spikes on the phone line.
5. Monster GreenPower™ RF Controlled Outlets: These outlets are controlled by the RF remote control.
6. RF Remote Control Dock: Convenient docking space for remote control
7. "Clean Power On" Indicator Light: Indicates Monster Clean Power™ Circuitry is functioning properly.
8. "Protection ON" Indicator Light: Indicates that power protection against surges and spikes is on.
9. "Ground OK" Indicator Light: Indicates that the PowerCenter is plugged into a properly grounded 120V AC outlet.

SIDE


10. Cable Line Surge Suppression: Provides surge protection on cable TV/antenna lines.
11. Satellite Line Surge Suppression: Ultra-low loss connection provides surge protection on satellite line.
12. Resettable Circuit Breaker: Activates to prevent overload. Press reset button to resume normal operation.
13. RF Sync for Remote Control: Synchronizes remote control with multiple RF PowerCenters.
14. RF remote control: Turns RF controlled outlets On or Off to reduce wasted stand-by mode energy.

HOOK-UP GUIDE

Monster GreenPower RF Control Outlets

These outlets are controlled by the included RF Remote Control. When you turn off these outlets with the Remote Control, the components plugged into these outlets will not draw any power, eliminating wasted stand-by mode power consumption.

HDP 1400G
TOP VIEW

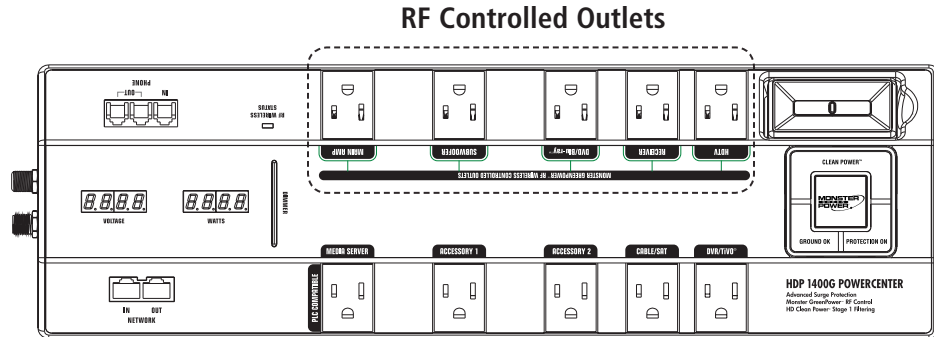

HOOK-UP GUIDE

RF Remote Control Syncing for Multiple PowerCenters

The GreenPower™ RF Remote Control can be used with more than one RF Controlled Monster® PowerCenter.™ To use the RF remote control for more than one unit, it is necessary to sync its signal to the PowerCenter

1. Plug in the PowerCenter's power cord to a grounded AC outlet. Do not connect any equipment to the PowerCenter's outlets before syncing the RF remote control.
2. Press the sync button on the bottom of the PowerCenter with the point of a pen or other object and hold down until you hear a single "beep." The unit is now in learning mode.
3. With the remote control at least 6" (15.2cm) from the PowerCenter, press and hold both On and Off buttons on the RF remote control. The PowerCenter will "beep" twice to indicate that it has learned the RF code.


NOTE: After pressing the sync button (Step 2), the PowerCenter remains in learning mode for 10 seconds. If you do not sync the remote control within 10 seconds, you must press the sync button again to activate learning mode.

HOOK-UP GUIDE

Coaxial Connections Hook-Up

Coaxial Connections provide surge protection against damaging voltage surges and spikes on the incoming coax cable. The HDP1400G Cable/TV coaxial connection also features ground loop isolation to dramatically reduce unwanted noise. Only a Cable TV line should be connected to the PowerCenter's Cable TV coaxial connection. Connecting a Satellite or other cable to the PowerCenter's Cable TV connection may result in compromised reception.

Protect TV/Cable and Satellite Connections as follows:

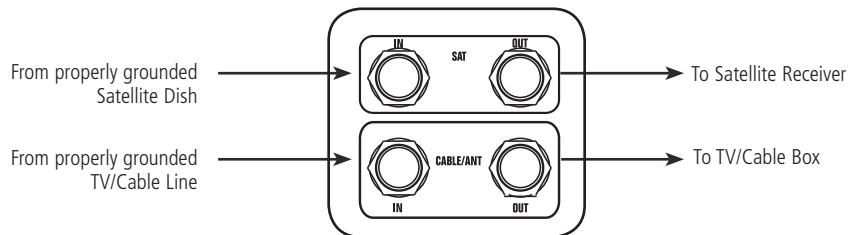

NOTES: You may need additional coaxial cables to connect the HDP1400G to your components.


To ensure complete power surge protection, all lines that connect to your AV components need to be connected to surge protected connections on the PowerCenter.

HOOK-UP GUIDE

Phone and Network Connections Hook-Up

Phone connections provide surge protection against damaging voltage surges and spikes coming from the phone line. This PowerCenter also incorporates a phone splitter for convenience.

Protect Phone and Network Connections as follows:

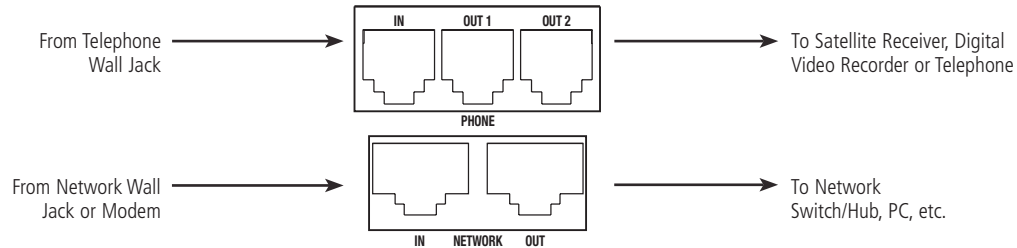

NOTES: The HDP 1400G is not intended for hook-up of any phone which carries two separate phone lines on a 4-pin RJ11 jack.

To ensure complete power surge protection, all lines that connect to your AV components need to be connected to surge protected connections on the PowerCenter.

TROUBLESHOOTING

Symptom	Possible Cause	Remedy
The PowerCenter is not receiving power.	The PowerCenter is not turned On.	<ul style="list-style-type: none"> • Turn the PowerCenter switch on. • Make sure the PowerCenter's AC power plug is plugged into a properly grounded 120 volts (nominal) wall outlet. • In some households, a wall switch may need to be turned on to make the wall outlet active. Try turning on the light switches located near the wall outlet.
	Too many devices are connected, causing an overload, tripping the Thermal Circuit Breaker.	<ul style="list-style-type: none"> • Press the PowerCenter Thermal Circuit Breaker button in to reset. Please allow 10 minutes before attempting to reset. If you reset too soon, the breaker will prematurely sense power overload and not allow the PowerCenter to operate. • If the Circuit Breaker continues to trip, try moving one or more components to another PowerCenter. You may be drawing too much current through one PowerCenter.
RF Remote Control does not turn outlets On/Off.	<ul style="list-style-type: none"> • Battery is dead. • Unit not plugged in. • Remote control is too far away from unit. 	<ul style="list-style-type: none"> • Replace battery. • Plug in unit. • Operate 30ft of unit.

TROUBLESHOOTING

Symptom	Possible Cause	Remedy
Component is not receiving power.	The component is plugged into a switched outlet and the PowerCenter has not been turned On.	<ul style="list-style-type: none"> • Turn the PowerCenter On. • Or, plug the component into an Unswitched outlet.
	The PowerCenter is plugged into a Switched outlet, but power on the component is not On. In some instances, a component plugged into a switched outlet won't receive power when the PowerCenter is turned On unless the component power is also switched On.	<ul style="list-style-type: none"> • Turn the component power On.
Speakers emit a humming or buzzing noise.	The PowerCenter is sharing AC power with equipment that is not properly grounded.	<ul style="list-style-type: none"> • Connect your PowerCenter to a dedicated outlet. • Try unplugging different components from the PowerCenter one at a time to see if the noise stops. If a component is discovered to be improperly grounded, attach a copper wire from the component's chassis to the PowerCenter's grounding post.

TROUBLESHOOTING

Symptom	Possible Cause	Remedy
Video picture has rolling bars or ghosting.	The incoming video signal is not properly grounded.	<ul style="list-style-type: none">• Contact your cable or satellite provider to correct your installation.
The PowerCenter is emitting a loud buzzing alarm.	The PowerCenter protection circuitry has sacrificed itself to protect connected equipment from a catastrophic surge.	<ul style="list-style-type: none">• The PowerCenter must be replaced. See the Warranty Information section for important details.

SPECIFICATIONS

HDP 1400G POWERCENTER

Continuous Duty Electrical Rating	120V/60Hz	
Maximum Current Rating	15A/1800W	
Protection Modes	Line-Neutral (L-N) Line-Ground (L-G) Neutral-Ground (N-G)	
Total Energy Dissipation	4626 Joules	
Clamping Level (TVSS Voltage)	400 Volts (PLC Outlet-Supression Voltage is 400-500V max. Steady state clamping voltage is 700V)	
Dimensions	Width:	17.12" 435mm
	Height With Feet:	2.40" 61mm
	Depth:	9.49" 128mm

LIMITED WARRANTY FOR CONSUMERS

Monster, LLC, 7251 Lake Mead Blvd West, Las Vegas, NV 89128, USA (“Monster”) extends to You this Limited Warranty. Statutory or common law may provide You with additional rights or remedies, which shall not be affected by this Limited Warranty.

DEFINITIONS

“Adequate Use” means use of the Product and Connected Equipment (i) within a home or dwelling, (ii) for private (as opposed to commercial) purposes, (iii) in conformance with all applicable local, state or federal law, code or regulations (including without limitation building and/or electrical codes), (iv) in accordance with manufacturer recommendations and/or instructions in the materials and documentation that accompany the Product and any Connected Equipment, (v) with proper electrical grounding, (vi) with proper and direct connection between the Product and an AC power source that has protective grounding (excluding gas or diesel powered generators), (vii) with cable or telephone lines to any Connected Equipment properly connected to the Product, and (viii) without a connection in a “daisy-chain” fashion to or with any extension cord, surge suppressor, power strip, uninterruptible power supply (“UPS”) or other equipment.

“Authorized Dealer” means any distributor, reseller or retailer that (i) was duly authorized to do business in the jurisdiction where it sold the Product to You, (ii) was permitted to sell You the Product under the laws of the jurisdiction where You bought the Product, and (iii) sold You the Product new and in its original packaging.

“Connected Equipment” means any device that is (i) generally suited to be used with the Product or products of the same kind, (ii) meets the requirements of all applicable laws and safety standards, (iii) contains only parts manufactured, sold or recommended by the original manufacturer of the Connected Equipment, and (iv) has not been altered, tampered with or modified by any person other than its manufacturer or service personnel authorized or recommended by the manufacturer of the Connected Equipment.

“Connected Equipment Damage” means physical damage to Connected Equipment caused by a Product Defect by a transient AC power, cable, telephone, or lightning surge while connected to a properly installed Product. Connected Equipment Damage (i) may not be caused by a defect or unrelated damaging of the Connected Equipment or a surge/spike

or lightning strike through a source, medium or connection other than through the Product, and (ii) does not extend to loss of data, or consequential, indirect or special damages resulting from the Connected Equipment Damage.

“Fair Market Value” (“FMV”) means the fair market value of the Connected Equipment at the time Connected Equipment Damage occurs.

“Formal Warranty Claim” means a claim made in accordance with the section “Formal Warranty Claims” herein.

“Maximum Coverage Amount” means the maximum amount that Monster will pay to You under this Limited Warranty for Connected Equipment Damages and is defined in relation to each Product in the Specifications Table below.

“Product” means a Product (i) that is listed in the Specifications Table below, (ii) that You bought from an Authorized Dealer new and in its original packaging, and (iii) whose serial number, if any, has not been removed, altered, or defaced.

“Product Defect” means a defect, malfunction, non-conformance to this Limited Warranty or other inadequacy of the Product that existed at the time when You received the Product from an Authorized Dealer and that causes a failure of the Product to perform in accordance with Monster’s documentation accompanying the Product, unless such failure has been caused completely or partly by (a) any use other than Adequate Use, (b) transportation, neglect, misuse or abuse by anyone other than Monster’s employees; (c) alteration, tampering or modification of the product by anyone other than a Monster employee; (d) accident (other than a malfunction that would otherwise qualify as a Product Defect); (e) maintenance or service of the Product by anyone other than a Monster employee; (f) exposure of the Product to heat, bright light, sun, liquids, sand or other contaminants; or (g) acts outside the control of Monster, including without limitation acts of God, fire, storms (excluding lightning surges), earthquake or flood.

“Warranty Period” means the time period during which Monster must have received Your Formal Warranty Claim. The different Warranty Periods related to Product Defects and Connected Equipment Damage are defined in the Specifications Table below. The Warranty Period commences on the date when You purchased or received (whichever occurs later) the Product from an Authorized Dealer as evidenced by the Authorized Dealer’s invoice, sales receipt or packing slip. If You do not have written proof of the date of purchase or receipt, then the Warranty Period commences three (3) months after the date when the Product left Monster’s factory as evidenced by Monster’s records. The Warranty Period ends after the time

defined in the Specifications Table has expired, or after You have transferred ownership of the Product, whichever occurs earlier. Also, You must call Monster and obtain a Return Authorization Number (as described under “How to Make a Claim”) within two (2) months after You discover a Product Defect (or should have discovered it, if such Product Defect was obvious).

“**You**” means the first individual person that purchased the Product in its original packaging from an Authorized Dealer. This Limited Warranty does not apply to persons or entities that bought the Product (i) in used or un packaged form, (ii) for resale, lease or other commercial use, or (iii) from someone other than an Authorized Dealer.

SCOPE OF THIS LIMITED WARRANTY

PRODUCTS. If a Product contained a Product Defect when You bought it from an Authorized Dealer and Monster receives a Formal Warranty Claim from You within two (2) months after You discover such Product Defect (or should have discovered it, if such Product Defect was obvious) and before the end of the Warranty Period for Product Defects applicable to the affected Product, then Monster will provide You with one of the following remedies: Monster will (1) repair or, at Monster’s sole discretion, replace the Product, or (2) refund to You the purchase price You paid to the Authorized Dealer for the affected Product if repair or replacement is not commercially practicable or cannot be timely made.

CONNECTED EQUIPMENT DAMAGE. Monster will also provide You with a remedy regarding Connected Equipment Damage if (i) You have a claim under the Limited Warranty for Products because of a Product Defect that causes Connected Equipment Damage despite Adequate Use, and (ii) Monster receives a Formal Warranty Claim from You before the end of the Warranty Period for Connected Equipment Damage applicable to the affected Product. If the conditions listed in the preceding sentence are met, Monster will provide You with one of the following remedies provided that Monster may decide at its sole discretion which of the three remedies it provides: Monster will (1) replace the damaged Connected Equipment; (2) pay to repair the damaged Connected Equipment; or (3) pay You the FMV of the Connected Equipment, provided that such payments shall not exceed (i) the Maximum Coverage Amount for the Product, or (ii) the actual damage having arisen from power surges due to a Product Defect. **NOTE: COMPENSATION FOR RESTORATION OF DATA LOSS IS NOT COVERED AND MONSTER DOES NOT ASSUME ANY LIABILITY FOR ANY INCIDENTAL, CONSEQUENTIAL OR INDIRECT DAMAGES UNDER THIS LIMITED WARRANTY. SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU.**

GENERAL PROVISIONS

CHOICE OF LAW/JURISDICTION. The laws of the State of California, USA, govern this warranty. It gives You specific legal rights, and You may also have other rights that vary from state to state and country to country. This warranty does not affect any additional rights You have under laws in your jurisdiction governing the sale of consumer goods, including, without limitation, national laws implementing EC Directive 44/99/EC.

OTHER RIGHTS. THIS LIMITED WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS, WHICH VARY FROM STATE TO STATE AND COUNTRY TO COUNTRY. THIS WARRANTY EXTENDS ONLY TO YOU AND CANNOT BE TRANSFERRED OR ASSIGNED. If any provision of this Limited Warranty is unlawful, void or unenforceable, that provision shall be deemed severable and shall not affect any remaining provisions. In case of any inconsistency between the English and other versions of this Limited Warranty, the English version shall prevail.

REGISTRATION. Please register Your Product at www.monsterpower.com. Failure to register will not diminish Your warranty rights.

SPECIFICATIONS TABLE

Product Model No.	Maximum Coverage Amount	Warranty Period for Product	Warranty Period for Connected Equipment Damage
HDP 1400G	USD\$500,000.00	5 years	5 years

*"Lifetime" means the lifetime of the original individual purchaser of the Product, or for as long as the original individual purchaser owns the Product, whichever is less in time

FORMAL WARRANTY CLAIM

HOW TO MAKE A CLAIM. In the event damage has occurred to Products or Connected Equipment, You must follow these instructions: (1) Call Monster within two (2) months after You discover a Product Defect (or should have discovered it, if such

Product Defect was obvious); (2) Give a detailed explanation of how the damage occurred; (3) Obtain a Return Authorization Number; (4) Upon receipt of a claim form (which may be sent to You after You filed Your Formal Warranty Claim), fill out the claim form entirely; (5) Return the Products, shipping prepaid by You (to be refunded if You are entitled to a remedy under the Scope of this Limited Warranty), to Monster for verification of damage, along with a copy of Your original sales receipts and proof of purchase (UPC label or packing slip) for such Products, the completed claim form, and printed Return Authorization Number on the outside of the return package (the claim form will include instructions for return).

TELEPHONE NUMBERS. If you bought the product in the United States, Latin America, or Asia Pacific, contact Monster, LLC (455 Valley Drive, Brisbane, CA 94005) at 1 877 800-8989. If you bought the product anywhere else, contact Monster Technology International Ltd., Ballymaley Business Park, Ennis, Co. Clare, Ireland. You can write or use one of the following telephone numbers: Canada 866-348-4171, Ireland 353 65 68 69 354, Belgium 0800-79201, Czech Republic 800-142471, Denmark 8088-2128, Finland 800-112768, France 0800-918201, Germany 0800-1819388, Greece 00800-353-12008, Italy 800971470, Netherlands 0800-0228919, Norway 800-10906, Russia 810-800-20051353, Spain 900-982-909, Sweden 020-792650, United Kingdom 0800-0569520

FURTHER PROCEEDINGS. Monster will determine whether a Product Defect existed and the damage to the Connected Equipment was caused by the Product. You must allow Monster access to the premises and site where the damage occurred and all equipment and property related thereto for Monster inspection by its employees or authorized representatives. Monster may, at its discretion, direct You to obtain a repair estimate at a service center or, to send the Connected Equipment to Monster for repair. If a repair estimate is required, You will be instructed on how to properly submit the estimate and the resulting invoice to Monster for payment. Any fees for repairs may be negotiated by Monster.

TIMING. If You bring a Formal Warranty Claim and fully comply with all terms and conditions of this Limited Warranty, Monster will use its best efforts to provide You with a remedy within thirty (30) days after receipt of Your Formal Warranty Claim (if You reside in the United States - forty-five (45) days if You reside elsewhere), unless obstacles outside Monster's control delay the process.



We invite you to visit the Monsters at: MonsterPower.com

Designed in the USA and manufactured for Monster to its quality specifications.

Made in China.

The Monster Power HDP 1400G is protected under the following patents: U.S.: 5,589,718; 7,262,945 B2; 6,473,510 B1; 6,614,636 B1; 6,683,770 B1; 6,829,129 B2; 7,262,945 B2; D559,239 S. Taiwan: NI-130119; NI-171813; NI-165023; NI-223486.

China ZL99107639.7.

Other Patents Pending.

Monster, Monster Cable, Monster Power, Monster Clean Power, T2, Tri-Mode, Monster GreenPower, the technology badges, and PowerCenter are trademarks and registered trademarks of Monster Cable Products, Inc. or its subsidiaries in the U.S. and other countries.

© 2009 Monster, LLC
7251 West Lake Mead Blvd.
Las Vegas, NV 89128, USA
1-877-800-8989

Monster Technology International Ltd.
Ballymaley Business Park
Gort Road, Ennis, Co. Clare, Ireland
001-866-348-4171